




PROVEN PERFORMER

On-Premises Laundry

SSEMNA (stack dryer)

Stack dryer features


- Durable galvanized steel cylinder with an extra-large 198 litres of volume
- Efficient dryer heating with 5,000 kCal (gas models) and up to 4,000 Watts (electric models)
- Large, easy-to-clean lint compartment
- Reversible door
- 1913.8 sq. cm door opening is the largest in the industry, providing easy loading and unloading




STACKABLE
UNIT



EASY
OPERATION



LARGE DOOR
OPENING



ROBUST
DESIGN

Controls

Dryer E-Mech control

The E-Mech control features a straightforward design that offers users simple drying selections and uses cue lights to monitor progress through the drying cycle.



SSEMNA

	SSEMNA
Type	Stack Dryer/Dryer
Control	Electronic
Control location	Front
Drum	
Capacity kg	10
Cylinder volume litres	198
Drum speed	
Spin speed G-Force	n/a
Spin speed rpm	n/a
Motor	
Motor size kW	0.25
Cabinet	
Cylinder finish	Galvanized
Colours	White
Door type (solid/window)	Solid or Window
Heating	
Heat sources	Gas or Electric
Heating element (Electric W)	4000
Connection	
Gas inlet connection mm	9.5
Gas consumption BTU/Hr	60 Hz: 22,500, 50 Hz: 20,000
Exhaust outlet dia. mm	102
Exhaust airflow litres/sec	60 Hz: 105 (220), 50 Hz: 85 (180)
Water temperatures	n/a
Operation	
Cycles*	Normal, Perm Press, Delicate, No Heat
Water consumption per cycle litres*	n/a
Water pressure bar	n/a
Cycle indicator lights	Yes
Power	
Electrical requirements (voltage/Hz/Ph)	240/50/1 (Electric)
Transport data	
Net weight kg	Electric/Gas 109/113
Shipping weight kg	Electric/Gas 115/120
Dimensions H×W×D mm	1986×683×711
Packing dimensions H×W×D mm	2032×737×832
Agency approvals	
Available agency approvals	See price sheet for applicable agency approvals by market


*Information provided applies to premier control offered by product class.



Dimensions

Stack Dryer/Dryer – electric

	A	B	C	D	E	F	G	H	I	J	K	L	M
SSEMNA	597	213	711	11	203	1184	1986*	102*	114*	683	391	392*	994*

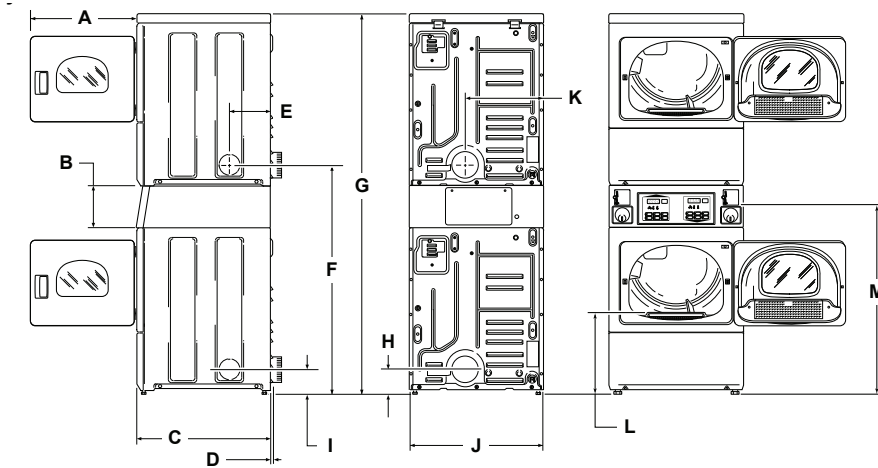

All measurements are in mm. *With levelling legs turned into base.

NOTE: Exhaust openings are 102 mm metal ducting.

