

SPEED QUEEN® ON-PREMISES LAUNDRY SOLUTIONS

Single Tumble Dryer

SA170


170 lb (77 kg)

Tumble Dryers

Our single pocket tumble dryers are designed with fewer moving parts, so that you'll face fewer maintenance problems and less wear and tear. We make it easier with a large, easy-to-clean lint compartment and a heavy-duty door hinge designed to withstand heavy usage.

- High-performance heater box increases energy efficiency, reduces drying times and provides a more comfortable operating environment.
- Precise drying performance with OPT (over-dry prevention technology).

- Large easy-to-clean lint compartment.
- Reversing option available.
- Quantum™ gives you complete laundry control to reduce costs and increase throughput.

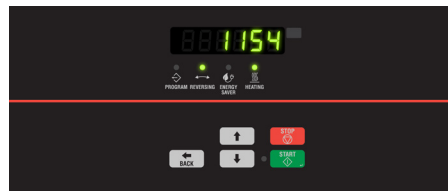

Quantum® Control


Revolutionary Quantum® technology combines equipment controls, programming and wireless networking into one complete OPL management system, giving you total control over your laundry room from any computer, anywhere in the world. Advanced diagnostics and audit data reports help you catch errors before they become bigger issues. Quantum is designed to help you reduce costs, decrease your downtime and increase your throughput.



Single Tumble Dryer

Specifications

		SA170
Control Option		Quantum
Capacity - lb (kg)		170 (77)
Overall Width - in (mm)		52.9 (1345)
Overall Depth - in (mm)		69.8 (1775)
Overall Height - in (mm)		94 (2390)
Cylinder Diameter - in (mm)		50.8 (1290)
Cylinder Depth - in (mm)		42.5 (1080)
Cylinder Volume - cu. ft (liters)		49.8 (1410)
Door Opening Size - in (mm)		26.9 (683)
Energy Data	Gas Models - Per Pocket	395,000 Btu/hr
	Steam Models - Per Pocket	502,125 Btu/hr
Gas Connections* - in (npt)		1
Plumbing Connections - Steam - in (npt)	Inlet	0.75
	Outlet	1
Air Outlet - in (mm)		12 (305)
Motor - HP	Fan	1.5
	Cylinder	1.5
Airflow - cfm		2150 (1010)
Electrical Specs - amps	Gas & Steam	
	Q	200-240V50/60/3 11
	N	440-480V/50/60/3 6
Shipping Dimensions Approx.- in (mm)	Width	52.1 (1320)
	Depth	73.8 (1870)
	Height	99 (2510)
Net Weight - lb (kg)	Gas	1400 (635)
	Steam	1550 (705)
Shipping Weight - lb (kg)	Gas	1480 (670)
	Steam	1630 (740)
Agency Approvals		AGA

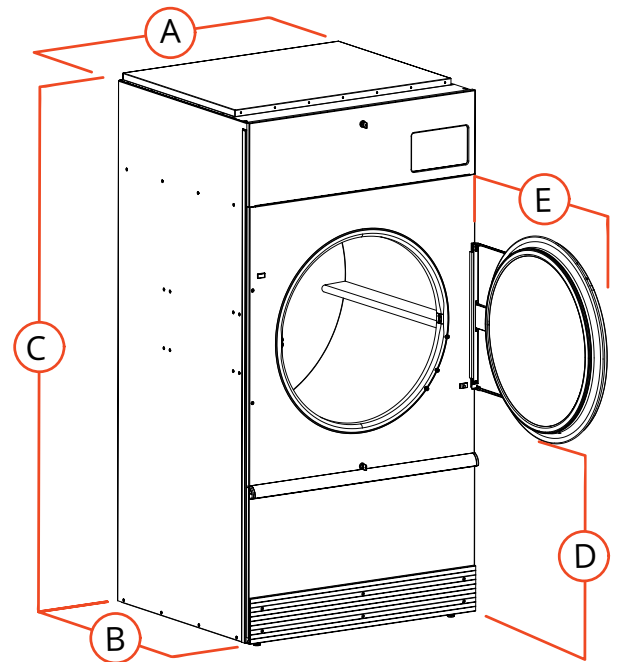

A.	Overall Width - in (mm)	52.9 (1345)
B.	Overall Depth - (mm + Install gap)	69.8 (1775)
C.	Overall Height - in (mm)	94 (2390)
D.	Door Bottom to Floor - in (mm)	33.9 (860)
E.	Door Swing - in (mm)	32.5 (825)

* LP gas available for 75 lb capacity only. Field conversion kits available for other capacities.

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Speed Queen distributor for specifications.

For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. Amperage ratings available in Installation Manual.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice.